

# SPIRAL<sup>®</sup> VP

VALUE & PERFORMANCE RIGID ROLLING DOOR

## Architectural Design, Quality Construction and Unprecedented Value

Featuring the stylish design and structural integrity of the Spiral<sup>®</sup> high-performance door series, the Spiral VP offers a new combination of quality, value and performance. Now, auto dealerships can maintain a consistent aesthetic look - from front to back - without sacrificing high performance. The Spiral VP integrates proven Spiral components and a small footprint that allows the door to be installed almost anywhere a conventional overhead door fits - without visible attachment hardware. With sleek styling, quiet functioning and a compact profile, a consistent 360-degree customer experience is now a reality.

For automotive environments with low to moderate traffic, the lower speed/ lower cycle Spiral VP offers aesthetic quality, durable performance and reliable security.

### Primary Industry



### Stylish Aesthetics

- Architecturally designed to complement the high-speed Spiral line of doors
- Crisp lines provide a stylish look ideal for new and existing auto dealerships and commercial automotive applications

### Proven Durability

- Constructed with heavy-duty, high-quality components

### Solid Security

- Minimum 1 3/16-inch thick double walled aluminum slats
- Integral rubber weatherseal
- Continuous heavy-duty hinge system

### Assured Operation

- Unmatched 20-year warranty on high-cycle components including door tracks, rollers and hinges
- Door components are the same as used on Spiral doors with millions of operating cycles



Full Vision and Standard Spiral Door Panel Configurations Shown



# SPIRAL® VP

## VALUE & PERFORMANCE RIGID ROLLING DOOR

### Model Name

- Rytec® Spiral® VP Direct Drive Door

### Size and Dimensions

- Up to 14'0" W x 14'0" H
- Multiple door configurations based on lift requirements

### Available Options

- Front spreader cover
- Chain hoist operator
- Custom colors

### Warranty

- 20-year extended warranty on door track, rollers & hinges
- One-year limited warranty on mechanical components
- One-year limited warranty on electrical components




### Operation

- Ultra-quiet, low maintenance operation
- Direct drive motor connects directly to drive shaft
- No springs or cables
- Compact AC drive motor with variable speeds allows for soft acceleration and deceleration
- Rated for 75 cycles per day
- System 4® controller housed in a NEMA 4X rated enclosure

### Construction

- Heavy-duty extruded aluminum door hinges
- Polyurethane rollers with sealed roller bearings
- Galvanized steel side column covers
- No visible mounting hardware

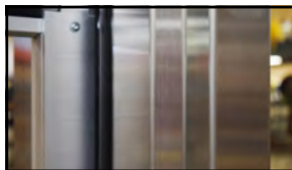

Galvanized steel side column cover

### Lift Configuration

- Standard lift
- High lift
- Vertical lift



Rollers with sealed roller bearings

### Door Panel Configuration

- Insulated door panel
- Vision slats
- Ventilated slats
- Integrated weatherseal

### Safety

- Thru-beam photo eye

### Travel Speed

- Opens at 12 inches per second

### Model Name

- Rytec® Spiral® VP Balanced Door

### Size and Dimensions

- Up to 14'0" W x 14'0" H
- Multiple door configurations based on lift requirements

### Available Options

- Heavy duty operator
- Chain fall
- Extended life springs
- Custom colors

### Warranty

- 20-year extended warranty on door track, rollers & hinges
- One-year limited warranty on mechanical components
- One-year limited warranty on electrical components



### Operation

- Torsion spring balancing system assists the motor in opening
- Aircraft quality cable lift method
- Standard overhead door operator
- Rated for 50 cycles per day

### Construction

- Heavy-duty extruded aluminum door hinges
- Polyurethane rollers with sealed roller bearings
- Extruded aluminum track
- No visible mounting hardware

### Lift Configuration

- Standard lift
- High lift
- Vertical lift

### Door Panel Configuration


- Insulated door panel
- Vision slats
- Ventilated slats
- Integrated weatherseal

### Safety

- Thru-beam photo eye

### Travel Speed

- Opens at 8 inches per second

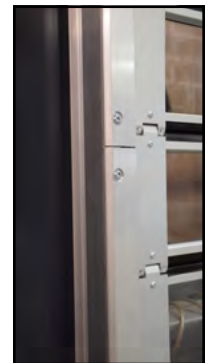

Low-profile side track



RytecDoors.com  
888-GO-RYTEC

Tel 262-677-9046  
Fax 262-677-2058  
One Cedar Parkway  
Jackson, WI 53037-0403